


Other connectors Series

D-Sub, For VGA - triple Row

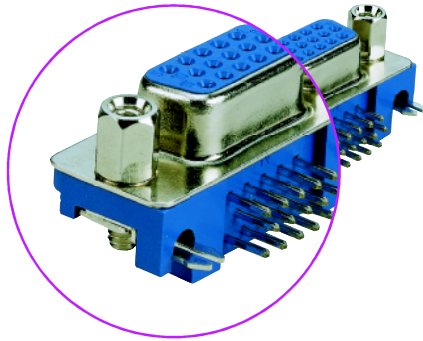

SPECIFICATIONS

Insulator:
 PBT THERMOPLASTIC,
 30% CLASS FILLED, UL
 Contact material:
 BRASS OR PHOSPHOR BRONZE
 ELECTRICAL CHARACTERISTICS
 Contact current rating: 5.0 amps
 temperature rating:
 -55 °C ~ +150 °C
 DIELECTRIC WITHSTANDING VOLTAGE:
 500 VAC MIN
 Insulation resistance:
 1000MΩ OHM MIN
 CONTACT RESISTANCE:
 80mΩ OHM MAX

