

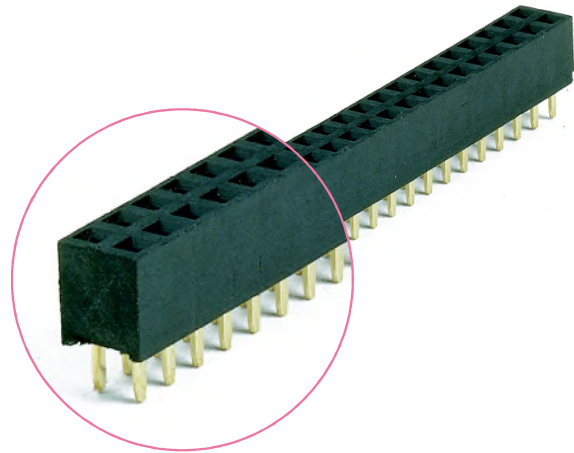
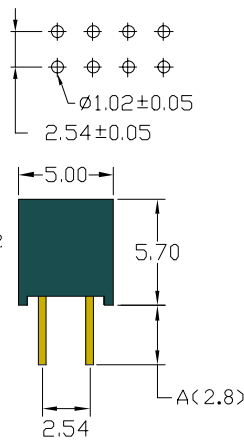


2.54 Series

Pin Header

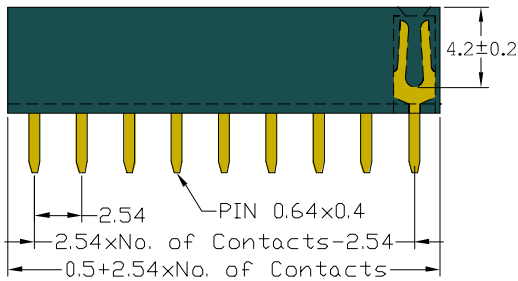

Recommended P.C.Board Hole Layout



SPECIFICATIONS

- Current Rating: 3 Amps
- Insulator resistance: 5000 Megohms Min.
- Contact resistance: 20 m ohm Max.
- Dielectric withstanding: AC 500 V
- Operating Temperature: -40° - +105°C
- Contact Material: Phosphor Bronze
- Insulator Material: Standard:P.B.T
- Finish: Gold flash or Tin plated or Duplex plating

P 8 5 5 8 - x x S 1 0 - x x x

Number of contacts

S10]-Straight

Plating thickness

| | |
|----|--------|
| 01 | Normal |
| 03 | 3 μ |
| 05 | 5 μ |
| 10 | 10 μ |
| 15 | 15 μ |
| 30 | 30 μ |

Plating material

| | |
|---|-----------------------|
| G | Gold plated |
| T | Tin plated |
| P | Lead & Tin plated |
| H | Selective gold plated |