



2.54 Series

Female Header / Right Angle



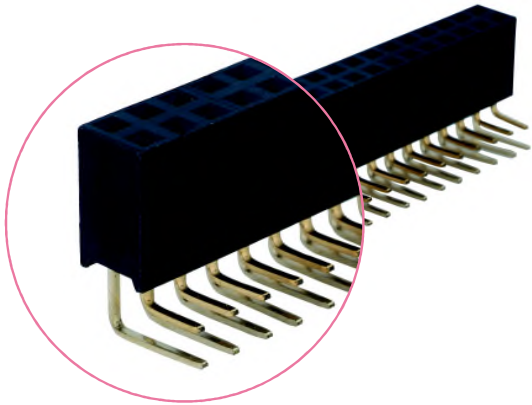


SPECIFICATIONS

Current Rating:
 3 Amps
Voltage Rating:
 230V
Insulator resistance:
 5000 Megohms Min.
Contact Resistance:
 20m ohms Max
Dielectric withstanding:
 AC 500 V
Operating Temperature:
 -25° C - +125° C
Contact Material:
 Brass
Insulator Material:
 PBT UL94V-0
 Color: Black
Finish:
 Gold flash

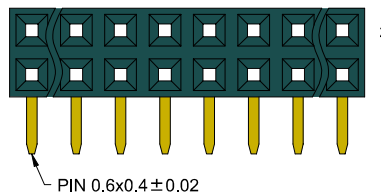

Recommended P.C.Board Hole Layout

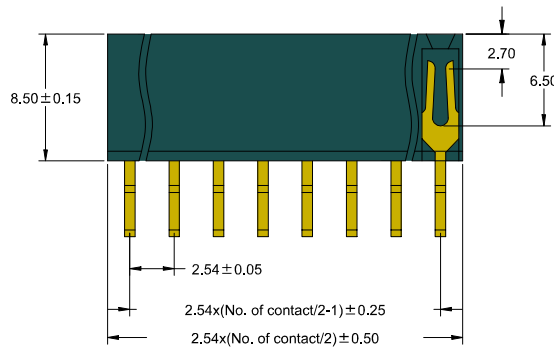

B 8 5 6 2 - X X R 1 0 X - 0 1 X

Insulator material
 N: Nylon-6T
 B: PBT
 L: LCP
 D: NY66

Row of pin
 1: single row
 2: dual row

Number of Contact

Appearance of pin header
 S10: Straight
 R10: Right angle
 C10: Side entry

Color

Plating material
 G Gold Plated
 T Tin Plated
 H Duplex Plated

Plating thickness
 01 Normal
 08 8u"
 15 15u"