





2.54 Series

Female Header / SMT



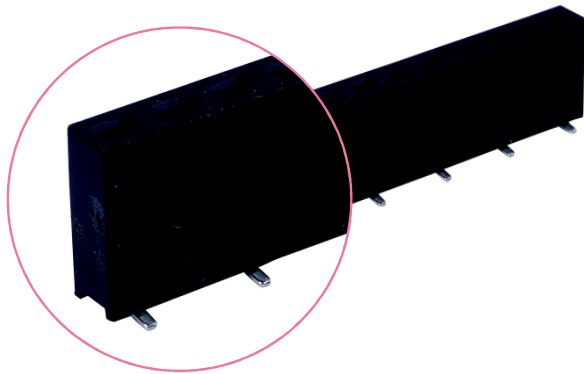


SPECIFICATIONS

Current Rating:
 3 Amps
 Voltage Rating:
 230V
 Insulator resistance:
 5000 Megohms Min.
 Contact Resistance:
 20m ohms Max
 Dielectric withstanding:
 AC 500 V
 Operating Temperature:
 -25° C - +125° C
 Contact Material:
 Brass
 Insulator Material:
 PBT UL94V-0
 Color:Black
 Finish:
 Gold flash

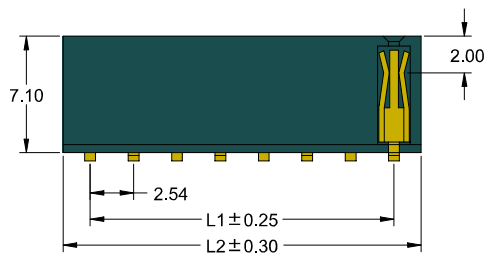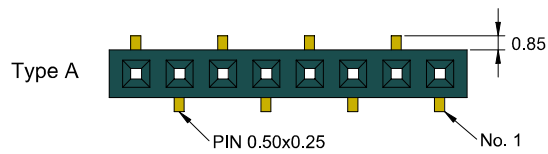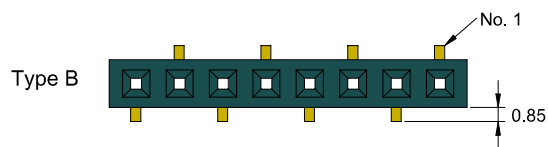

Recommended
P.C.Board
SMD Layout



B 8 5 7 1 - X X M 1 0 X - 0 1 X

Insulator material
 N: Nylon-6T
 B: PBT
 L: LCP
 D: NY66

Row of pin
 1: single row
 3: 3 row

Number of Contact

Appearance of pin header
 S10: Straight
 R10: Right angle
 M10: SMT

Color

Plating material
 G Gold Plated
 T Tin Plated
 H Duplex Plated

Plating thickness
 01 Normal
 08 8u"
 15 15u"