





2.0 Series

Battery Socket

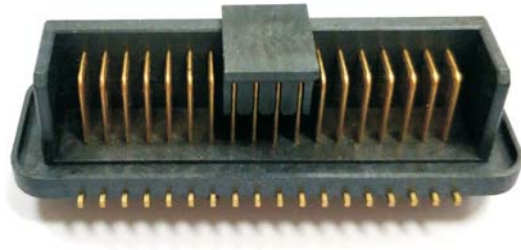

SPECIFICATIONS

Current Rating:
 2 Amps
 Voltage Rating:
 125V
 Insulator resistance:
 3000 Megohms Min.
 Contact Resistance:
 20m ohms Max
 Dielectric withstanding:
 AC 500 V
 Operating Temperature:
 -40°C - +125°C
 Contact Material:
 Phosphor Bronze
 Insulator Material:
 L.C.P UL94V-0
 Color: Black
 Finish:
 3U"min. Gold plating on
 contact area
 others area Gold flash
 over 50U" Nickel

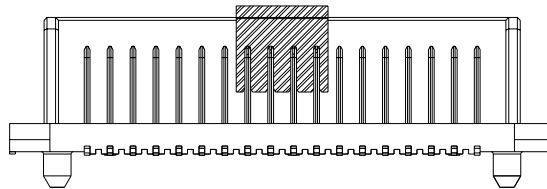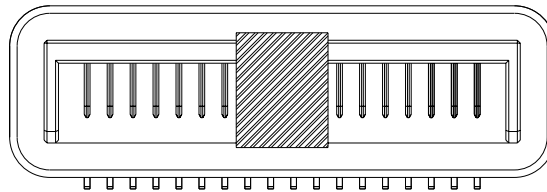

L 2 0 1 5 - 1 8 M O P X - 0 3 X - C

Insulator material
 N: Nylon-6T
 B: PBT
 L: LCP
 D: NY66

Number of Contact

Appearance of pin header
 S10: Straight
 D10: Right angle
 MOP: SMT

Color

Plating material
 G Gold Plated
 T Tin Plated
 H Duplex Plated

Plating thickness
 01 Normal
 08 8u"
 15 15u"