



Other connectors Series

P. L. C. C Socket

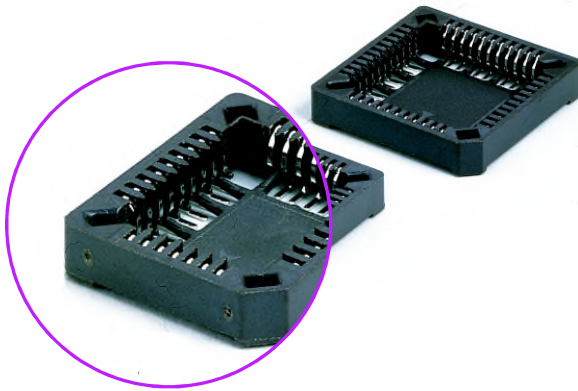

SPECIFICATIONS

Current Rating:
 1 Amps
 Insulator resistance:
 1000 Megohms Min.
 Contact resistance:
 20 m ohm Max.
 Dielectric withstanding:
 AC 500 V For 1 minute
 Operating Temperature:
 -55° - +105°C
 Contact Material:
 PHOSPHOR BRONZE
 Insulator Material:
 PPS & 40%Glass Fiber
 UL 94V-0 RATED

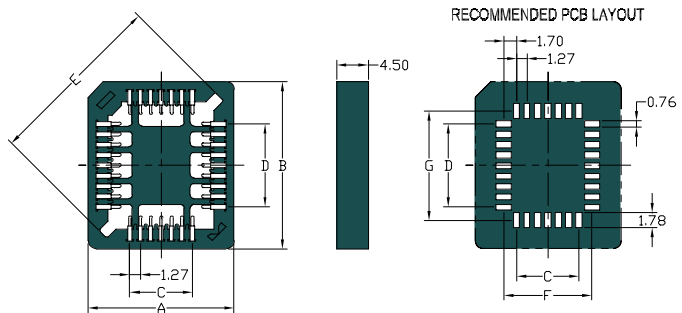

| No. of Contacts | A±0.20 | B±0.20 | C±0.20 | D±0.20 | E±0.20 | F±0.20 | G±0.20 |
|-----------------|--------|--------|--------|--------|--------|--------|--------|
| 20 | 15.66 | 15.66 | 5.08 | 5.08 | 17.28 | 8.48 | 8.48 |
| 28 | 18.20 | 18.20 | 7.62 | 7.62 | 20.87 | 11.02 | 11.02 |
| 32 | 18.20 | 20.74 | 7.62 | 10.16 | 22.78 | 11.02 | 13.56 |
| 44 | 23.28 | 23.28 | 12.70 | 12.70 | 28.05 | 16.10 | 16.10 |
| 52 | 25.82 | 25.82 | 15.24 | 15.24 | 31.85 | 18.64 | 18.64 |
| 68 | 30.90 | 30.90 | 20.32 | 20.32 | 38.83 | 23.72 | 23.72 |
| 84 | 35.98 | 35.98 | 25.40 | 25.40 | 46.00 | 28.80 | 28.80 |

C 3 4 6 0 - x x S 1 0 - 0 1 T

P. L. C. C Socket

Number of contacts

Plating thickness

01 Normal

Plating material

T Tin plated