



# 2.54 Series

## SATA : SMT

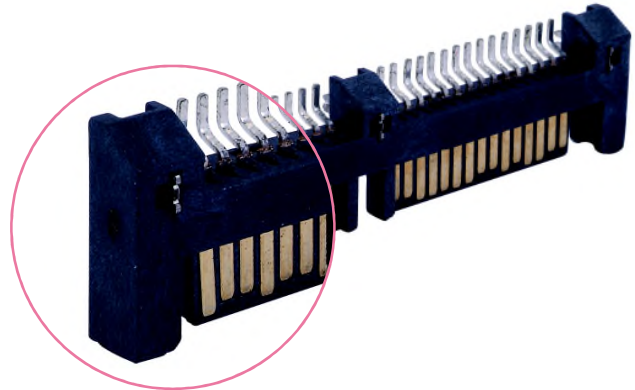

### SPECIFICATIONS

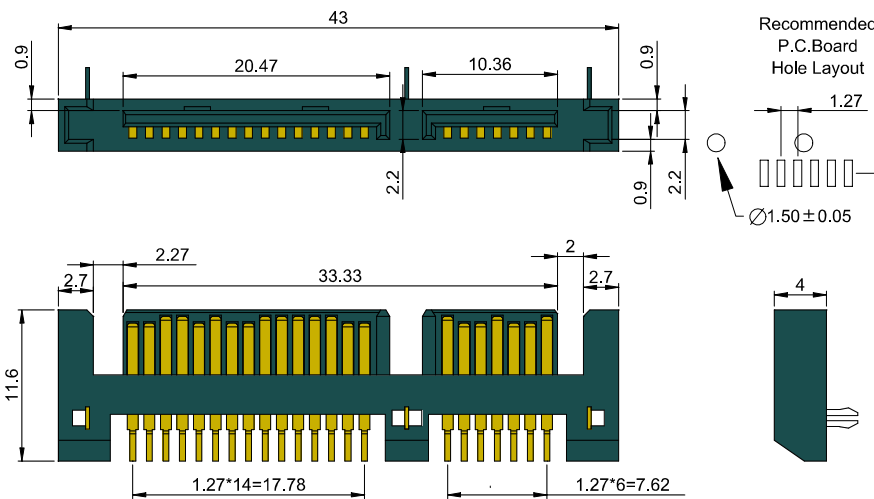

#### SPECIFICATIONS

Current Rating:  
1.0 Amp

Insulator resistance:  
1000 Megohms Min. AT DC 100V

Dielectric withstanding:  
AC 500V/minute, 1mA

Operating Temperature:  
-40° C ~ +105° C

Contact Material:  
Phosphor Bronze

Insulator Material:  
PBT 30% UL94V-0  
Color: Black

plating:  
Contact area:  
Gold flash plating 0.8 μ" min.  
over 30~50 μ" Nickel (Ref.)  
Solder area:  
Tin/Lead plating 80~120 μ" (Ref.)  
over 30~50 μ" Nickel (Ref.)

