



2.54 Series

Shrouded Header With Eject Latch / Straight

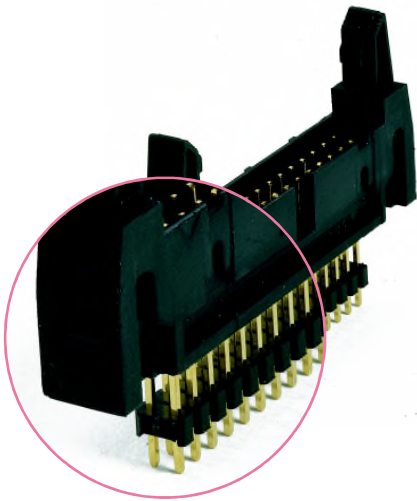


SPECIFICATIONS

Current Rating:
 3 Amps
 Insulator resistance:
 5000 Megohms Min.
 Dielectric withstanding:
 AC 500 V
 Operating Temperature:
 -40° - +105°C
 Contact Material:
 Brass
 Insulator Material:
 P.B.T.
 Finish:
 Gold flash

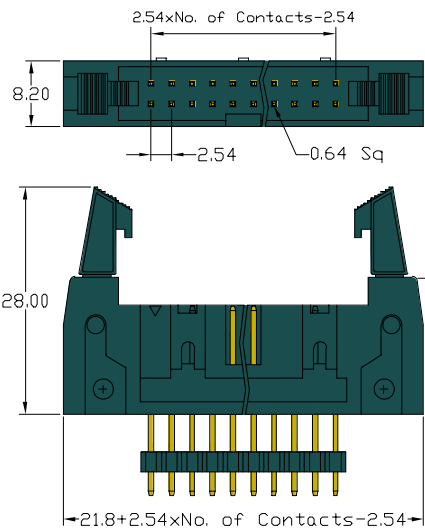

Recommended P.C.Board Hole Layout

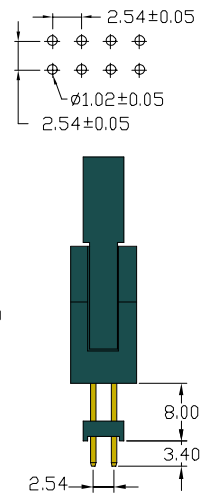

B 6 9 8 0 - x x S 2 2 - x x x

Number of contacts

S22 -shrouded header with pin header

Plating thickness	
01	Normal
03	3 μ
05	5 μ
10	10 μ
15	15 μ
30	30 μ

Plating material	
G	Gold plated
T	Tin plated
P	Lead & Tin plated
H	Selective gold plated