

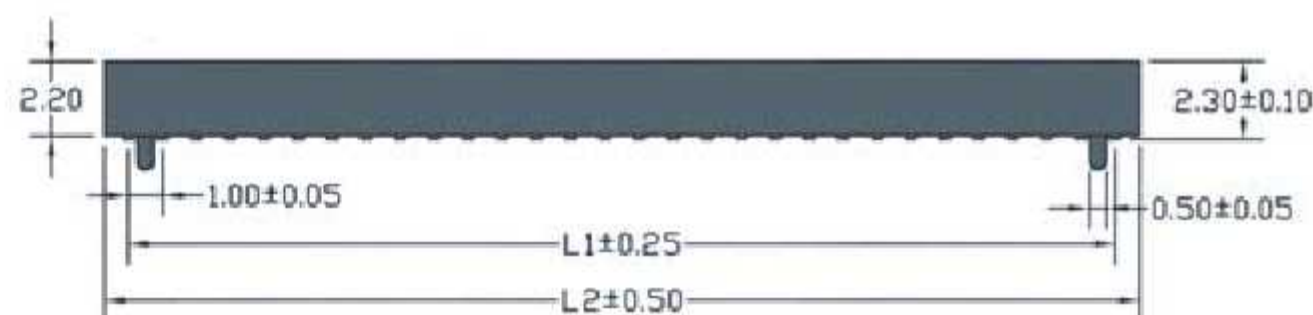
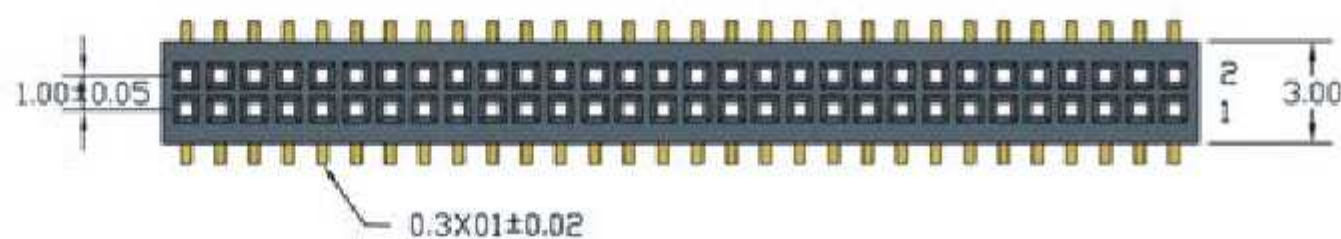
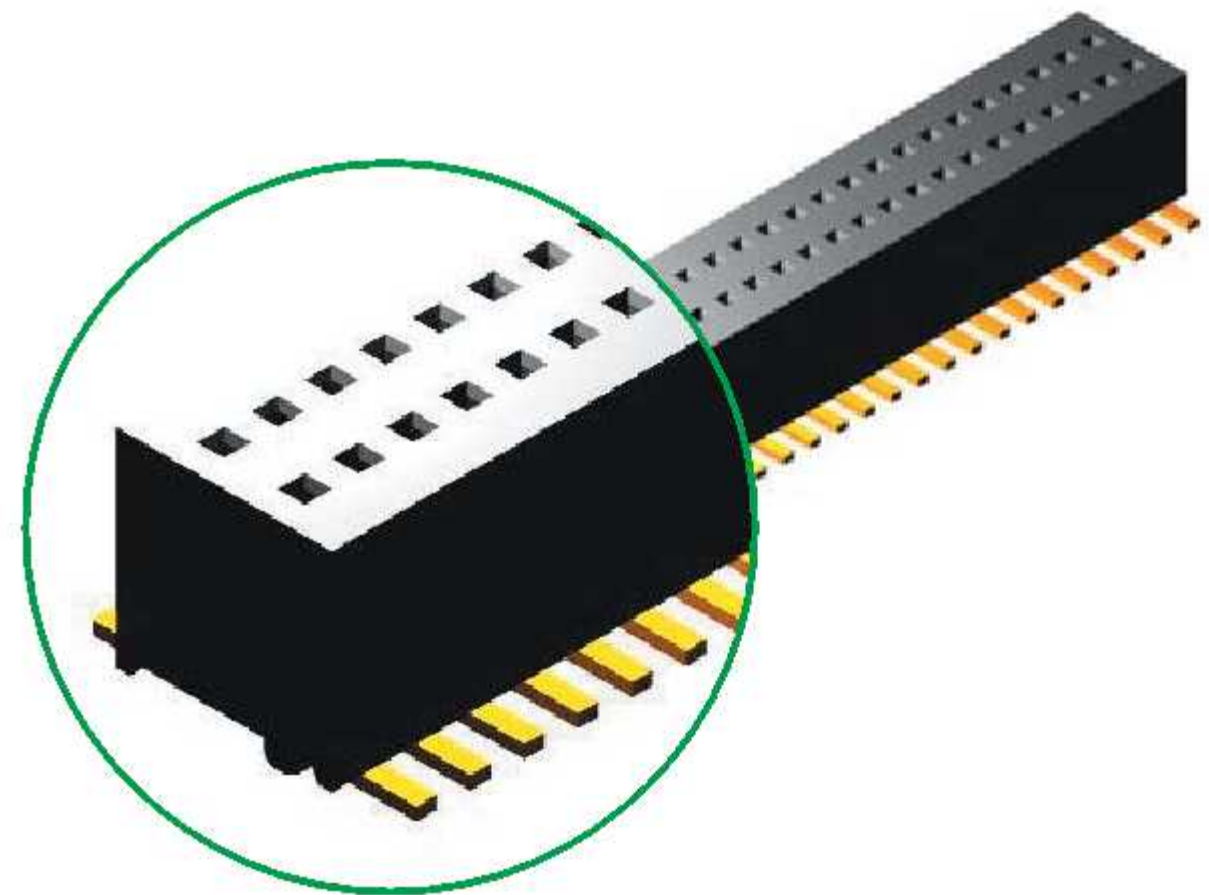


Female Header SMT



Recommended
P.C.Board
SMD Layout

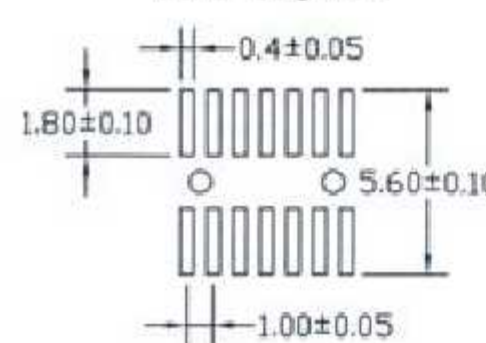

SPECIFICATIONS

SPECIFICATIONS

- Current Rating:
1 Amp
- Insulator Resistance:
1000 Megohms Min.
- Contact Resistance:
20 m ohms Max.
- Dielectric Withstanding:
AC 500V/minute
- Operating Temperature:
-40° ~ +105°C
- Contact Material:
Phosphor bronze
- Insulator Material:
LCP UL94V-0
- Color: Black
- Finish:
Gold, Tin or Duplex plated
- Standard: Gold flash
- Duplex plated:
Gold plated on contact area
Tin on solder area

P **8** **1** **2** **2** - **X** **X** **M** **X** **X** - **X** **X** **X**

Female Header

Number of contacts

Locating peg

- 10** w/o Locating peg
- OP** with Locating peg

Plating thickness

- 01** Normal
- 03** 3 μ
- 05** 5 μ
- 10** 10 μ
- 15** 15 μ
- 30** 30 μ

Plating material

- G** Gold plated
- T** Tin plated
- P** Lead & Tin plated
- H** Selective gold plated