


2.0 Series

Female Header, SMT

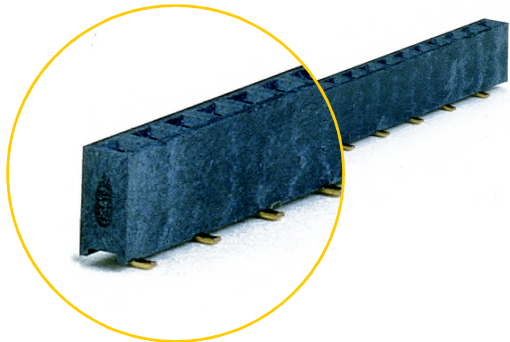

SPECIFICATIONS

Current Rating:
 2 Amps
 Voltage Rating:
 125V
 Insulator resistance:
 3000 Megohms Min.
 Contact Resistance:
 20m ohms Max
 Dielectric withstanding:
 AC 500 V
 Operating Temperature:
 -40° C - +105° C
 Contact Material:
 Phosphor Bronze
 Insulator Material:
 Nylon-6T UL 94V-0
 Color:Black
 Finish:
 Gold flash

