


# 2.54 Series



## Female Header Right Angle

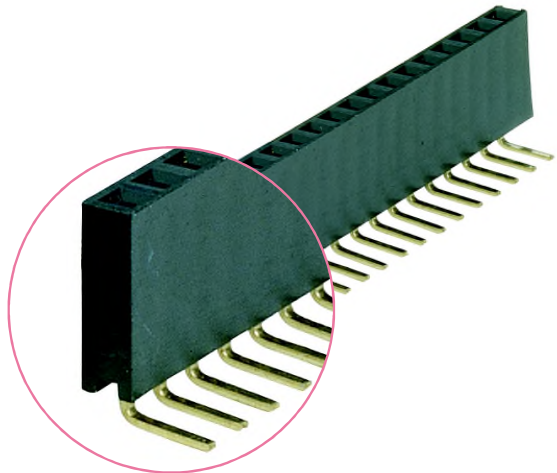



### SPECIFICATIONS

#### SPECIFICATIONS

Current Rating:  
 3 Amp  
 Insulator resistance:  
 5000 Megohms Min.  
 Contact resistance:  
 20 m ohms Max.  
 Dielectric withstanding:  
 AC 1000V/minute  
 Operating Temperature:  
 -40° ~ +105° C  
 Contact Material:  
 Phosphor Bronze  
 Insulator Material:  
 PBT UL94V-0  
 Color: Black  
 Finish:  
 Gold, Tin or Duplex plated  
 Standard: Gold flash all over  
 Duplex plated:  
 Gold plated on contact area  
 Tin on solder area

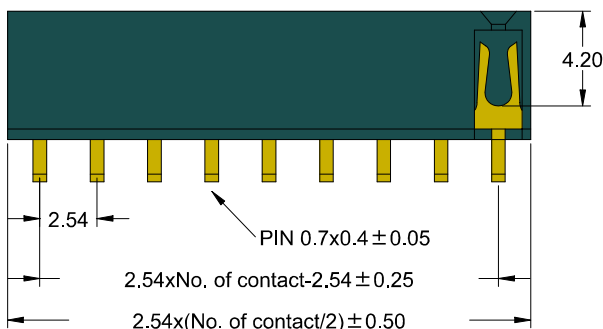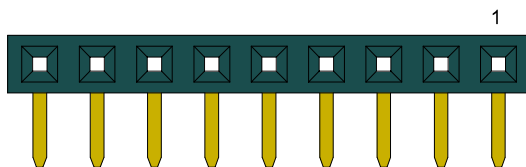

Recommended  
P.C.Board  
Hole Layout



P 8 5 5 7 - x x R 1 0 - X X X

Number of contacts

R10 -right angle

#### Plating thickness

01	Normal
03	3 μ
05	5 μ
10	10 μ
15	15 μ
30	30 μ

#### Plating material

G	Gold plated
T	Tin plated
P	Lead & Tin plated
H	Selective gold plated