
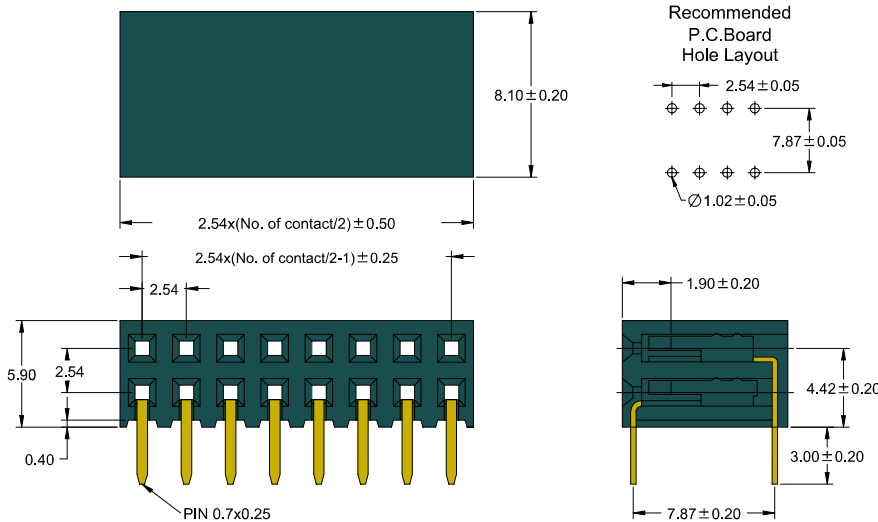


# 2.54 Series

## Female Header / Side Entry

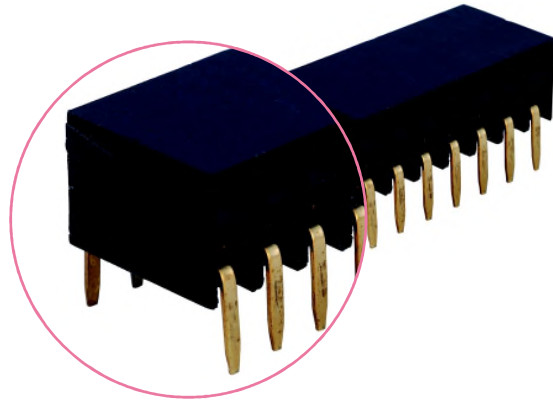

### SPECIFICATIONS

#### SPECIFICATIONS

- Current Rating:  
3 Amp
- Insulator resistance:  
5000 Megohms Min.
- Contact resistance:  
20 m ohms Max.
- Dielectric withstanding:  
AC 1000V/minute
- Operating Temperature:  
-40° ~ +105° C
- Contact Material:  
Phosphor Bronze
- Insulator Material:  
P.B.T UL94V-0
- Color: Black
- Finish:  
Gold, Tin or Duplex plated  
Standard: Gold flash all over  
Duplex plated:  
Gold plated on contact area  
Tin on solder area

P 8 5 6 6 - X X C 1 0 - X X X

Number of contacts

Side entry

#### Plating thickness

01	Normal
03	3 μ
05	5 μ
10	10 μ
15	15 μ
30	30 μ

#### Plating material

G	Gold plated
T	Tin plated
P	Lead & Tin plated
H	Selective gold plated