



2.0 Series

Shrouded Header With Eject Latch



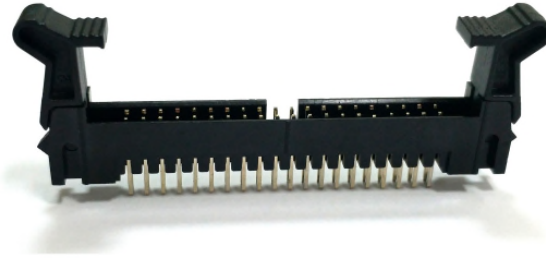


SPECIFICATIONS

CURRENT RATING:
 1.5AMPS
INSULATION RESISTANCE:
 1000M Ω MIN
CONTACT RESISTANCE:
 20M Ω MAX
WITHSTANDING VOLTAGE:
 AC 500V
OPERATION TEMPERATURE:
 -40° TO+105°
CONTACT MATERIAL:
 BRASS
INSULATOR MATERIAL:
 POLYESTER (UL 94V-0)
STANDARD:
 NYLON-66

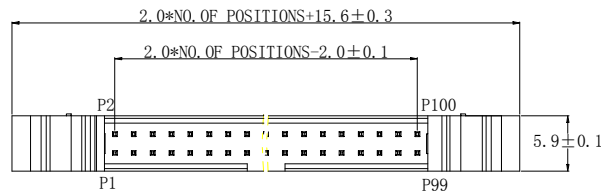

Recommended P. C. B. Layout

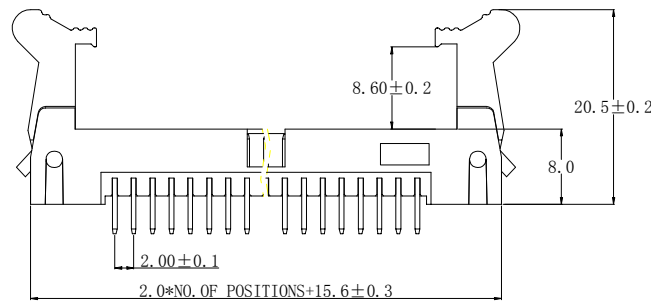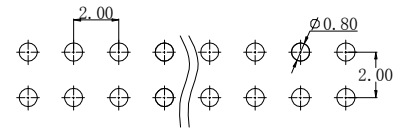

D 6 8 7 0 - x x S 1 0 B - 0 1 G

Insulator material
 D - Nylon-66
 B - PBT
 L - LCP

Number of Contacts
 6 8 7 0

Color

S 1 0 -straight

Plating material
 G Gold Plated
 T Tin Plated
 H Duplex Plated

Plating thickness
 01 Normal
 08 8u''
 15 15u''