
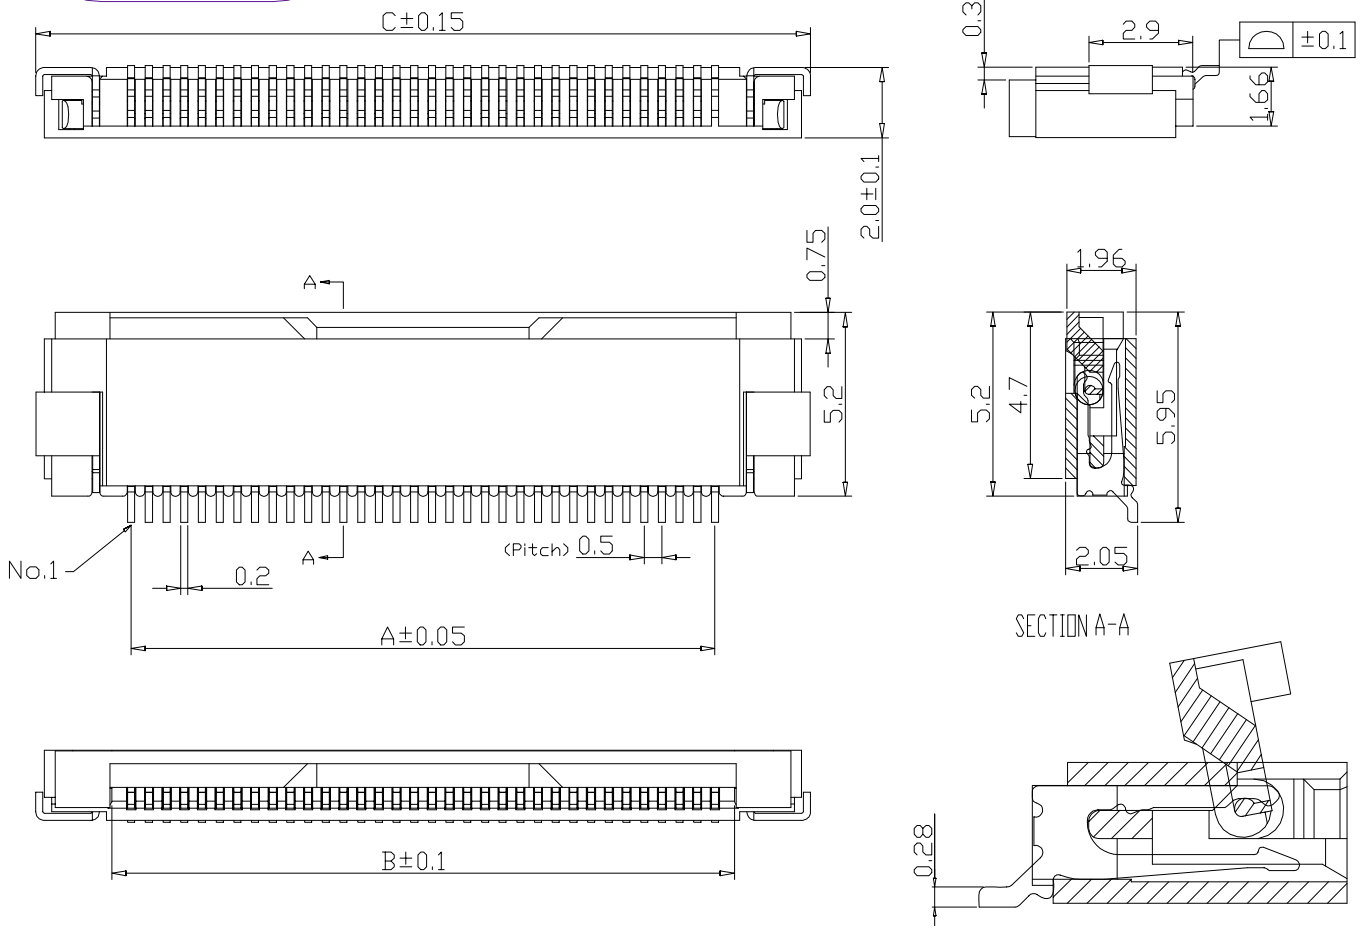


0.5掀盖式 FPC

SPECIFICATIONS

Current rating:
0.5Amps
Insulator resistance:
50 Megohms Min.
Contact resistance:
30 Milliohms Max.
Dielectric withstanding:
AC/DC 50V
Operating temperature:
-55°C - +85°C
Contact Material:
Phosphor Bronze
Insulator Material:
LCP(本色) UL94V-0
PPS BLACK UL94V-0
Finish:
Tin Plated

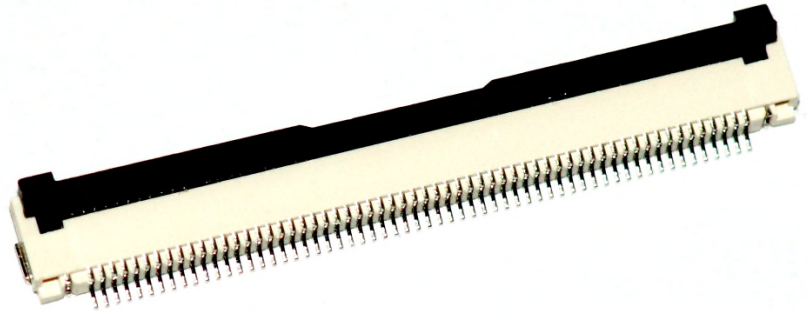

L 1 0 0 5 - X X X 1 0 W - 0 1 T

Insulator material
E: Nylon-46
L: LCP

Color

Plating material
G Gold Plated
T Tin Plated
H Duplex Plated

Number of Contact

Appearance of pin header
J10: 上接触
J20: 下接触
J30: 掀盖式

Plating thickness
01 Normal
08 8u"
15 15u"